





ABPI PANEL PRODUCTS

FOR INDUSTRIAL, AGRICULTURAL, & COMMERCIAL APPLICATIONS



ABPI - SQUARE EDGE - DOUBLE SKIN

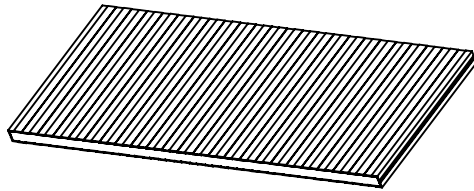

ABPI - LAP JOINT - DOUBLE SKIN (UTILIDOR)

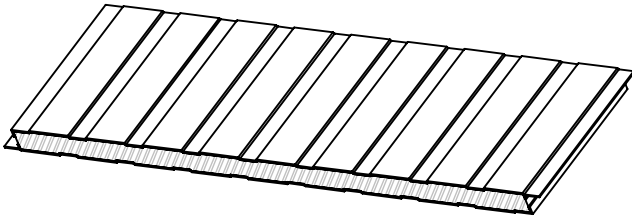

ABPI - SLEEVE JOINT - DOUBLE SKIN (UTILIDOR)

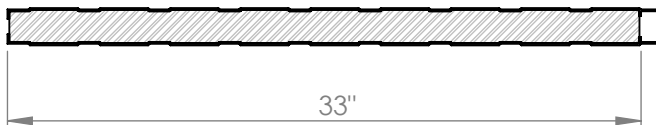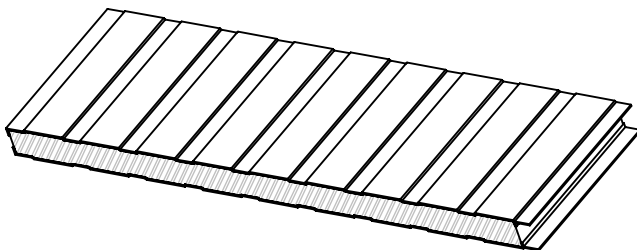

TECHNICAL INFORMATION

Square Edge Panel

Panel Thickness: 1 1/2"

Panel Width: Square Edge 47 1/2" coverage

Lap Joint / Sleeve Joint Panel

Panel Thickness: 1 1/2", 2", 2 1/2", 3", 4" & 6"

Panel Width: Lap / Sleeve Joint - 33" coverage

Panel Length: Minimum: 4'-0"

Maximum: 40'-0"

other lengths available on request**

Skin Thickness: Standard 26 ga.

other gauges available by request**

Skin Materials: Galvanized (G90)

Galvalume

Painted

Stainless Steel by request**

Insulation: Polyurethane

Density: 2.5 lbs./cu.ft. minimum

R-Value: R 7.14 / inch

Fire Testing in accordance with CAN/ULC S102-M88

Flame Spread: 65

Smoke Development: 210

C.F.I.A. APPROVAL (on selected panels- # A399)

WEIGHT CHART: lbs/sq.ft.

Double Skin Skin Material	Panel Thickness						
	Ga. 1.5"	2"	2.5"	3"	4"	6"	
Galvanized	26	2.2	2.3	2.4	2.5	2.7	3.1
Galvalume	26	2.1	2.2	2.3	2.4	2.6	3.0
Painted	26	2.1	2.2	2.3	2.4	2.6	3.0
Stainless Steel	26	1.9	2.0	2.1	2.2	2.4	2.8

Please contact ABPI's Technical Department for more info.



A Better Panel Inc.
Box 6165
4006 - 60th Ave
Innisfail, AB
T4G 1S8
www.abetterpanel.com
ph: 403-227-4545
fax: 403-227-4535
toll free: 1-877-352-7979



	NAME	DATE		
DRAWN	SD	Nov./12		
CHECKED				
ENG APPR.				
MFG APPR.				
COMMENTS:	SIZE DWG. NO. A ABPI PANEL-1			REV.
DO NOT SCALE DRAWING	SCALE: 1:1			SHEET 1 OF 1

ABPI PANEL PRODUCTS - Tank

FOR INDUSTRIAL, AGRICULTURAL, & COMMERCIAL APPLICATIONS



ABPI - LAP JOINT - UTILIDOR SINGLE SKIN (TANK PANEL)

Board Stock w/ paper backing on request

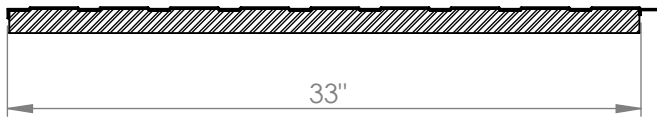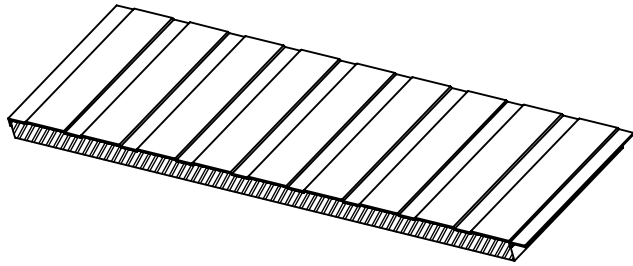

ABPI - CORRUGATED LAP JOINT - SINGLE SKIN (TANK PANEL)

Board Stock w/ paper backing on request

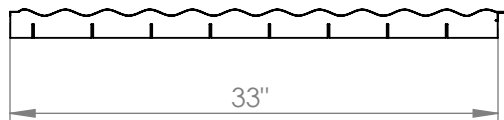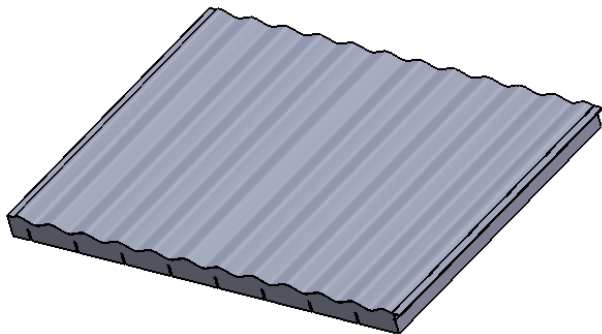

Tank panel foam with kerf cuts every 4" per 33" coverage.
More cuts can be added to achieve a tighter bend radius.

TECHNICAL INFORMATION

Lap Joint Panel

Panel Thickness: 1 1/2", 2", 2 1/2", 3"
4" & 6" available by request

Corrugated Lap Panel

Panel Thickness: 1 1/2", 2", 2 1/2", 3"
4" & 6" available by request

Panel Width: Lap Joint- 33" coverage
Tank Panel- 33" coverage

Panel Length: Minimum: 4'-0"
Maximum: 40'-0"
other lengths available on request**

Skin Thickness: Standard 26 ga.
other gauges available by request**

Skin Materials: Aluminum Stucco Embossed
Clear (0.020 & 0.024)
Galvanized (G90)
Galvalume
Painted
Stainless Steel by request**

Insulation: Polyurethane

Density: 2.5 lbs./cu.ft. minimum

R-Value: R 7.14 / inch

Operating Temperature: up to 100° C (212°F)

High Temp Foam Option: up to 150° C (300°F)

Please contact ABPI's Technical Department for more info.

WEIGHT CHART: lbs/sq.ft.

Single Skin Skin Material	Panel Thickness						
	Ga.	1.5"	2"	2.5"	3"	4"	6"
Aluminum	24	0.6	0.7	0.9	1.0	1.3	1.9
Galvanized	26	1.3	1.4	1.5	1.6	1.8	2.2
Galvalume	26	1.2	1.3	1.4	1.5	1.7	2.1
Painted	26	1.2	1.3	1.4	1.5	1.7	2.1
Stainless Steel	26	1.1	1.2	1.3	1.4	1.6	2.0

Please contact ABPI's Technical Department for more info.



A Better Panel Inc.
Box 6165
4006 - 60th Ave
Innisfail, AB
T4G 1S8
www.abetterpanel.com
ph: 403-227-4545
fax: 403-227-4535
toll free: 1-877-352-7979

	NAME	DATE
DRAWN	SD	Nov./12
REV.	SD	June 17/13


COMMENTS:
DO NOT SCALE DRAWING

SIZE	DWG. NO.	REV.
A	ABPI PANEL-2a	

SCALE: 1:1 SHEET 1 OF 1

Panel Profiles

Mesa Profile

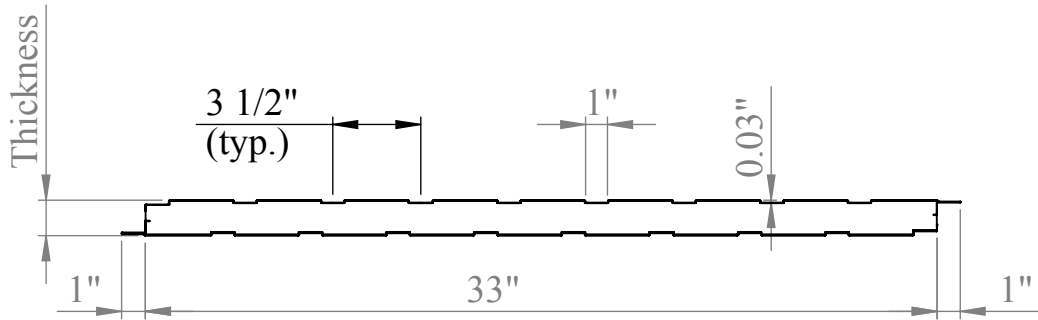

Corrugated Profile



A Better Panel Inc.
 Box 6165
 4006 - 60th Ave
 Innisfail, AB
 T4G 1S8
 www.abetterpanel.com
 ph: 403-227-4545
 fax: 403-227-4535
 toll free: 1-877-352-7979

	NAME	DATE		
DRAWN				
CHECKED				
ENG APPR.				
MFG APPR.				
COMMENTS:			SIZE	DWG. NO.
DO NOT SCALE DRAWING			A	Panel Profiles
			SCALE:1:1	REV.
				SHEET 1 OF 1